
KARYA DIJITAL



24 Ricoh G6 Print Head

- RicohG6 printhead high-speed industrial print head, to better meet the demand of industrialization production.
- Magnetic suspension linear motor for higher printing accuracy.
- Negative pressure ink control system and ink degassing system greatil enhance the stability and fluency of the ink jet.
- Belt automatic cleaning system to ensure continuous production and improve the production efficiency.
- The active take-up/unwinding structure ensures the stable stretchcbility of the fabric, so that the final appearance of the pattern is not deformed.

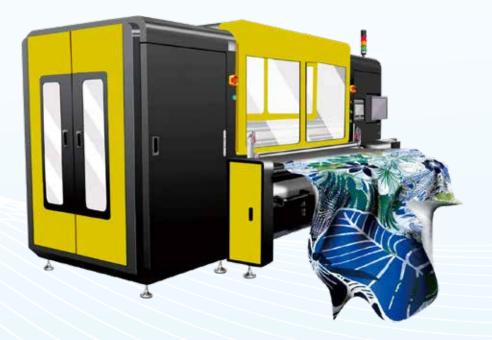

Machine model				回経回
Printer head	Ricoh Gen-6 Printhead			
Print height	2-30mm range is adjustabe			
Max. Print width	SCANTON			PACKING DETAILS
Max. Fabric width	1900mm/2700mm/3250mm			
Production mode	310m²/h (2pass)			
Image type	JPEG / TIFF / BMP file format, RGB / CMYK color mode			
Ink color	Ten colors optional : C, M, Y, K, Lc, Lm, Grey, Red, Orange, Blue			
Types of ink	Reactive / Disperse / Pigment / Acid / Cationic ink			
RIP Software	Neostampa / Wasatch / Texprint			
Transfer system	Continuous conveyor belt, automatic unwinding and rewinding			
Head cleaning	Auto head cleaning auto scraping device			
Power	Power ≤ 18 kW			
Power supply	380-420 VAC 3-phase, 4-wire plus ground			
Compressed air	0.3 m³/min. 6 bar Air pressure			
Working environment	Temperature 18-28 °C, humidity 50%-70%			
Width	1900mm	2700mm		3200mm
Overall dimensions	4200mmx2770mmx2300mm (L) (W) (H)	4925mmx2770mmx2300mm (L) (W) (H)	6330 n (L)	nmx2700mmx2300mm (W) (H)
Weight	3500kg	3900kg		4500kg

